

LOW

Hydraulic Torque Tool


LOW HYDRAULIC

With an open hexagon design and alloy lightweight structure the Christie LOW range of hydraulic torque tools fit directly onto the nut or bolt head, making them ideal for use on applications with limited overhead access or with fasteners having excessive thread protrusion.

Storage boxes and trolleys available



See table on opposite page for dimensions and details

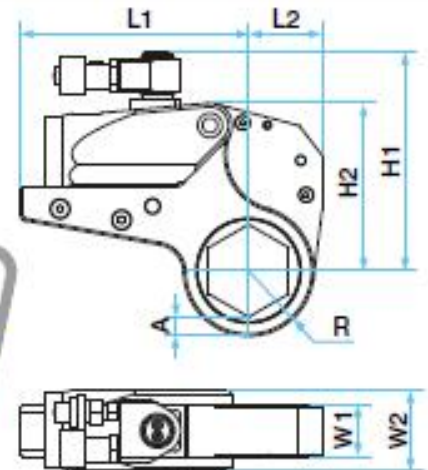

HIRE, SALES & ADVICE
01709 550088

- Accuracy within +/-3%
- 360° Swivel Coupler for easy hose alignment
- Head unit accepts hexagon reducing sleeves for use on a range of smaller fasteners
- Change of head unit is quick and easy with single pin release



Drive Unit			Interchangeable Cassette Heads (metric)					Drive Unit & Cassette Assembled											
Model	Weight (Kg)	Torque (Nm)	Hex Size (mm)	Radius 'R' (mm)	Wall 'A' (mm)	Average Weight (Kg)	Model Number	Drive Unit and Cassette Dimensions (mm)											
								L1	L2	H1	H2	W1	W2						
2 LOW	1	180-2,230	19	27	16	1.6	2LOW-19	140	46	132	102	32	51						
			22	27	14		2LOW-22												
			27	27	11		2LOW-27												
			30	29	12		2LOW-30												
			32	29	11		2LOW-32												
			34	31	11		2LOW-34												
			36	31	10		2LOW-36												
			41	34	10		2LOW-41												
			46	37	10		2LOW-46												
			50	40	11		2LOW-50												
			55	43	11		2LOW-55												
			60	46	11		1.7							2LOW-60	135	105	32	51	
4 LOW	2	440-5,740	34	36	16	4.4	4LOW-34	185	55	177	136	42	66						
			36	36	15		4LOW-36												
			41	39	15		4LOW-41												
			46	42	15		4LOW-46												
			50	44	15	4.6	4LOW-50		60										
			55	46	14		4LOW-55												
			60	50	15		4LOW-60												
			65	53	15		4LOW-65												
			70	56	15		4LOW-70												
			75	59	15		4LOW-75												
80	61	15	4LOW-80	184	61	187	146	42	66										
8 LOW	3.3	890-10,200	41	46	22	8	8LOW-41	223	71	209	170	53	83						
			46	46	19		8LOW-46												
			50	46	17		8LOW-50												
			55	50	18		8LOW-55												
			60	52	17		8LOW-60												
			65	55	17		8LOW-65												
			70	58	17		8LOW-70												
			75	60	17		8LOW-75												
			80	63	16		8LOW-80												
			85	66	16		8LOW-85												
			90	69	17		8LOW-90												
			95	71	16		8LOW-95												
			100	75	17		8.4							8LOW-100	78	216	177	53	63
			105	78	17									8LOW-105					
14 LOW	5.5	1,852-17,200	50	60	31	11.6	14LOW-50	275	87	236	203	64	99						
			55	60	28		14LOW-55												
			60	60	25		14LOW-60												
			65	60	22		14LOW-65												
			70	60	19		14LOW-70												
			75	63	19		14LOW-75												
			80	66	19		14LOW-80												
			85	69	19		14LOW-85												
			90	72	20		14LOW-90												
			95	74	19		14LOW-95												
			100	77	19		14LOW-100												
			105	80	19		14LOW-105												
			110	83	19		14LOW-110												
			115	87	20		14LOW-115												
			117	87	19		14LOW-117												
30 LOW	11.4	3,500-41,000	85	78	28	29	30LOW-85	313	117	309	272	85	131						
			90	78	27		30LOW-90												
			95	83	28		30LOW-95												
			100	83	25		30LOW-100												
			105	89	28		30LOW-105												
			110	89	25		30LOW-110												
			115	95	28		30LOW-115												
			117	95	27		30LOW-117												
			120	95	25		30LOW-120												
			125	101	29		30LOW-125												
			130	101	26		30LOW-130												
			135	104	26		30LOW-135												
			140	110	29		30LOW-140												
			145	110	26		30LOW-145												
			150	116	29		30LOW-150												
			155	116	26		30LOW-155												
			160	128	36	30	30LOW-160							128	321	285	85	131	
			165	128	33		30LOW-165												
			170	128	30		30LOW-170												
			175	128	27		30LOW-175												