



CR

Heavy Duty Hydraulic Torque Tool


CR HYDRAULIC

The square drive design of the CR range of torque tools enables the easy fitment of impact sockets and ancillaries, making them ideal for tightening and un-tightening bolts of all sizes. The steel construction means they are suitable for the toughest of bolting applications.

- 12 position reaction
- Reversible operation
- Rapid double action operation
- Accurate to within +/-3%
- Corrosion resistant
- Conforms to European Standards for subsea and underground work
- Robust 100% steel construction



The CR tool is available with optional swivel couplings and special reactions

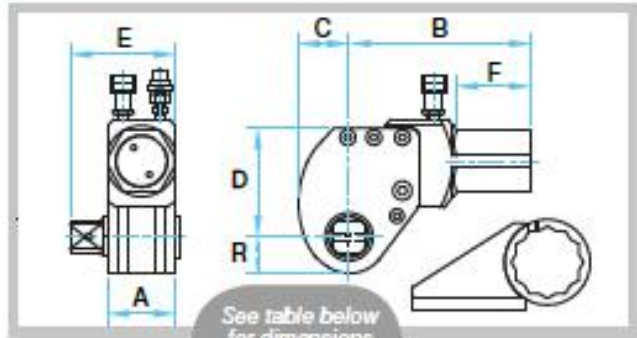

See table below for dimensions and details

Smart Socket

Transducerized hexagonal socket for torque verification on non-impacting square drive torque tools



Refer to page 26 of our Hand Held Torque Tools brochure or visit our website for further details.

HIRE, SALES & ADVICE
01709 550088

Model	Dimensions (mm)							Weight Kg	Maximum Torque Nm	Square Drive
	A	B	C	D	E	F	R			
CR 1	42	124	32	65	73	45	24	4	1,360	¾"
CR 1.5	50	143	30	65	90	51	25	6	2,040	1"
CR 3	52	175	40	92	92	57	35	8	4,488	1"
CR 5	65	180	50	97	120	60	41	13	7,888	1½"
CR 7	65	207	54	112	120	76	45	16	10,060	1½"
CR 11	83	222	61	133	138	89	45	22	14,960	1½"
CR 15	95	230	70	140	172	82	52	31	20,400	2½"
CR 20	97	265	74	157	168	102	62	44	28,560	2½"
CR 30	115	290	73	175	189	109	69	54	43,520	2½"
CR 50	144	320	93	200	249	124	86	103	68,000	3½"
CR 60	160	388	110	225	254	150	94	146	81,350	3½"
CR 80	173	416	115	258	278	178	100	178	108,800	3½"