



Flange Alignment Pins

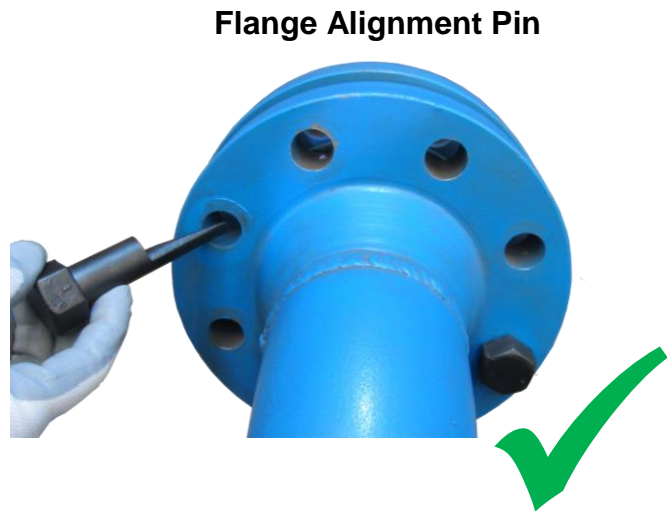

Safe, Fast and Effective

- Tapered shaft eliminates need for hammering and prying when lining up flange bolts holes
- Compensates for up, down and rotational misalignment
- Size range: 3/8" to 3-5/8"
- Available in regular or extra-long versions
- Sold individually or in sets

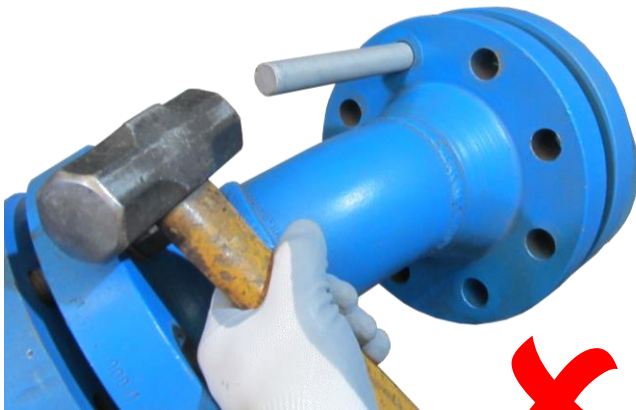

Flange Alignment Pin

Flange Alignment Pins

Safer option

Does not require the use of a hammer



Easy to use

Individual			
Part No	Bolt Hole Size	Length	Weight (Kg)
FT0	1/2"	2-3/8"	0.06
FT01	5/8"	2-3/4"	0.11
FT02	3/4"	3-1/4"	0.20
FT03	7/8"	3-1/2"	0.31
FT04	1"	4"	0.45
FT06	1-1/8"	5"	0.68
FT08	1-1/4"	5-1/2"	0.91
FT1012	1-3/8"	6-1/4"	1.30
FT14	1-1/2"	6-1/2"	1.47
FT16	1-5/8"	7-1/4"	1.87
FT1820	1-3/4"	7-7/8"	2.15
FT22	1-7/8"	8-3/8"	3.18
FT2426	2"	9"	3.01
FT30	2-1/8"	12"	4.88
FT34	2-3/8"	13-1/4"	6.12
FT3642	2-5/8"	14"	7.71
FT48	2-7/8"	13-5/8"	11.06
FT5054	3-1/8"	18"	16.27
FT60	3-5/8"	20"	25.06

Individual – Extra Long			
Part No	Bolt Hole Size	Length	Weight (Kg)
FT0L	1/2"	5-3/8"	0.28
FT01L	5/8"	5-3/4"	0.34
FT02L	3/4"	6-1/4"	0.40
FT03L	7/8"	6-1/2"	0.51
FT04L	1"	7"	0.68
FT06L	1-1/8"	8"	1.02
FT08L	1-1/4"	8-1/2"	1.36
FT1012L	1-3/8"	9-1/4"	1.81
FT14L	1-1/2"	9-1/2"	3.00
FT16L	1-5/8"	10-1/4"	2.61
FT1820L	1-3/4"	10-7/8"	3.18
FT22L	1-7/8"	11-3/8"	3.69
FT2426L	2"	12"	4.20
FT30L	2-1/8"	15"	6.12
FT34L	2-3/8"	16-1/4"	8.16
FT3642L	2-5/8"	17"	9.53

Sets with Case		
Part No	2 of Each Size	Weight (Kg)
FTS24	3/4", 7/8", 1"	3.63
FTS26	3/4", 7/8", 1", 1-1/8"	4.99
FTS28	3/4", 7/8", 1", 1-1/8", 1-1/4"	6.80
FTS212	3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8"	9.98
FTS1426	1-1/2", 1-5/8", 1-3/4", 2"	22.68

Sets with Case – Extra long		
Part No	2 of Each Size	Weight (Kg)
FTS24L	3/4", 7/8", 1"	5.89
FTS26L	3/4", 7/8", 1", 1-1/8"	8.16
FTS28L	3/4", 7/8", 1", 1-1/8", 1-1/4"	9.52
FTS212L	3/4" to 1-3/8"	14.51



W. CHRISTIE (INDUSTRIAL) LTD

CHRISTIE HOUSE, MEADOWBANK ROAD,
ROTHERHAM, SOUTH YORKSHIRE, S61 2NF UK
T: +44(0)1709 550088 F: +44(0)1709 550030
E: INFO@WCHRISTIE.COM

www.wchristie.com