



C-RAD T

Pneumatic Torque Tool with Torque Transducer



C-RAD T PNEUMATIC WITH TRANSDUCER

With torque tool accuracy of +/- 4% combined with built-in transducer accuracy of +/- 1%, the C-RAD T range is the easy way to ensure bolting jobs are carried out correctly.

The convenience of a built-in transducer means:

- Every bolt tightening operation can be recorded
- Data can be easily uploaded to a PC (Software supplied on USB Memory Stick)
- Data can be viewed in real time with a smart phone or tablet* via Bluetooth technology
- Quick and easy set-up

* Android systems only (an app. for Apple is currently under development).




Notebook not supplied



*Model C-RAD 10T with integral nose cone

See table below for dimensions and detail

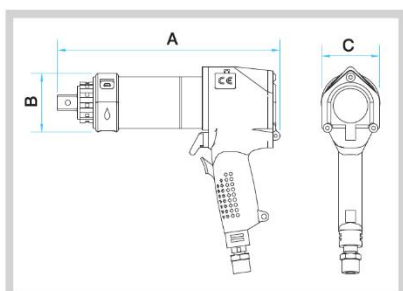

Model	Drive Size	Torque Range (Nm)	Speed (rpm)	Dimensions (mm)			Weight Kg
				A	B	C	
C-RAD 10T*	3/4"	400-950 Nm	30	339	71	69	6.0 kg
C-RAD 14T	3/4"	275-1350 Nm	12	266	71	69	4.0 kg
C-RAD 20T	1"	400-2000 Nm	10	264	77	69	4.5 kg
C-RAD 46T	1"	1360-4600 Nm	12	379	94.3	93	10.5 kg

HIRE, SALES & ADVICE
01709 550088