


CR

Heavy Duty Hydraulic Torque Tool


CR HYDRAULIC

The square drive design of the CR range of torque tools enables the easy fitment of impact sockets and ancillaries, making them ideal for tightening and un-tightening bolts of all sizes. The steel construction means they are suitable for the toughest of bolting applications.

- 12 position reaction
- Reversible operation
- Rapid double action operation
- Accurate to within +/-3%
- Corrosion resistant
- Conforms to European Standards for subsea and underground work
- Robust 100% steel construction

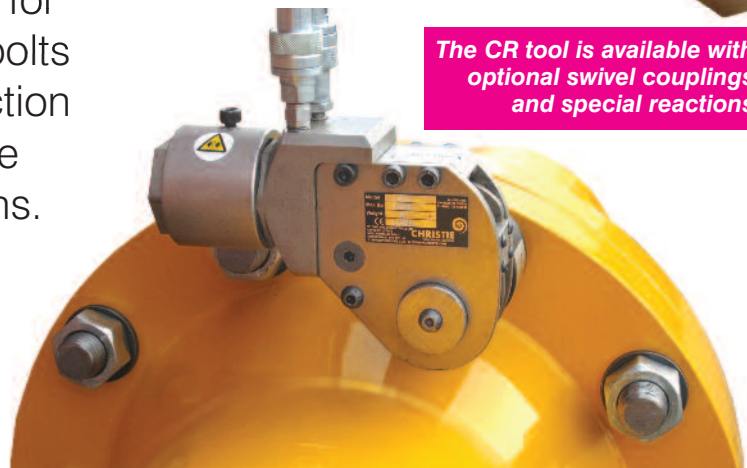

The CR tool is available with optional swivel couplings and special reactions

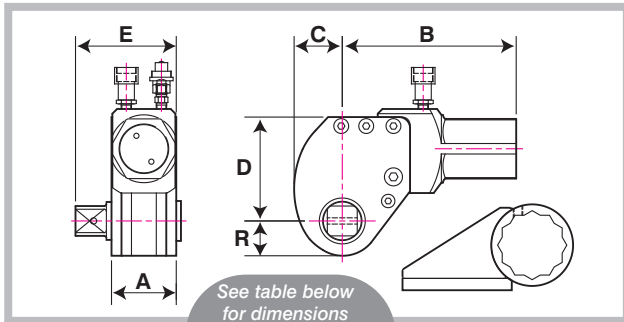


See table below for dimensions and details

Smart Socket

Transducerized hexagonal socket for torque verification on non-impacting square drive torque tools

Refer to page 14 of our Hand Held Torque Tools brochure or visit our website for further details.

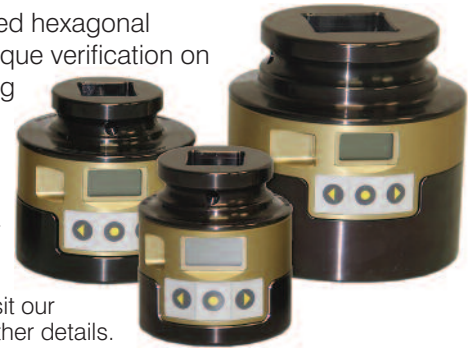

HIRE, SALES & ADVICE
01709 550088

Model	Dimensions (mm)						Weight Kg	Maximum Torque Nm	Square Drive
	A	B	C	D	E	R			
CR 1	42	115	28	65	70	24	4	1,360	¾"
CR 1.5	50	140	30	65	90	25	6	2,040	1"
CR 3	52	175	40	90	92	35	8	4,488	1"
CR 5	65	180	45	95	120	37	13	7,888	1½"
CR 7	65	207	58	112	120	45	16	10,060	1½"
CR 11	83	222	66	130	138	45	22	14,960	1½"
CR 15	95	230	70	140	172	52	31	20,400	2½"
CR 20	97	265	74	157	175	62	44	28,560	2½"
CR 30	115	290	80	175	185	69	54	43,520	2½"
CR 50	145	320	90	200	230	85	103	68,000	3½"
CR 80	172	416	100	258	272	100	178	108,800	3½"